




CHECK AND METERING VALVE

MBST-250-ABNR

OVERCENTRE VALVE
SINGLE ACTING
FULLY COMPENSATED

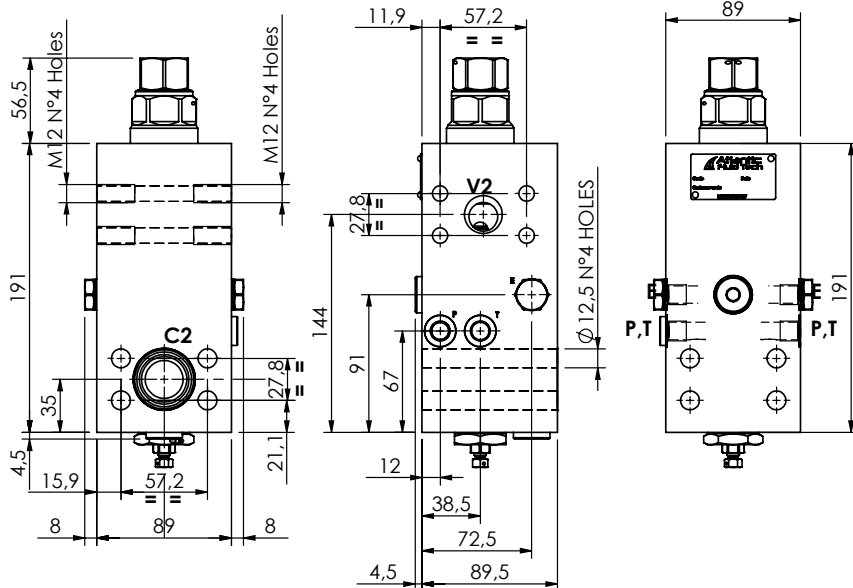


SPECIFICATIONS

Max. operating pressure:	350 bar
Rated flow:	300 l/min
Manifold:	Steel
Weight:	10,99 kg

NOTES

When correctly adjusted for the special excavator installation, these valves meet the requirement of ISO 8643

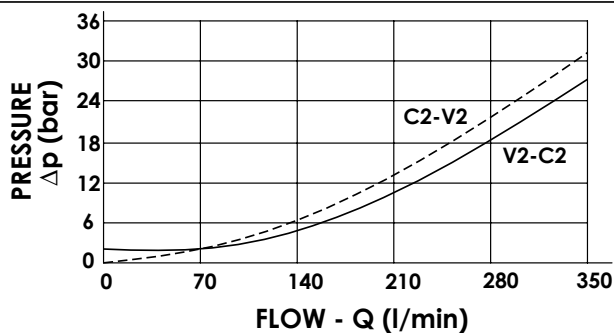

ORDERING CODES

Quick code	Description	Pilot ratio	Main ports size	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)
MB000406	MBST-250-ABNR-13-S10-N350	13:1	V2,C2 : 1 SAE 6000 P,T,E : G 1/4	350	250-400	60